

FIG. 39

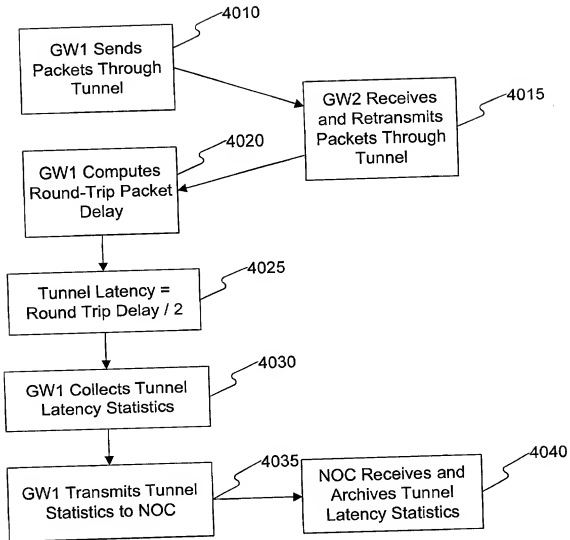


FIG. 40

```

4105 ~<monitoring_information>
4110 ~   name="org-name"
4115 ~   vip="virtual IP of org"
4120 ~   ctime="system up time in seconds"
4125 ~<tunnel>
4130 ~   vip="vip of buddy"
4135 ~   age="age,uptime"
4140 ~   <bandwidth>
4145 ~       data="tod.interval,tx_bytes,tx_packets"
4150 ~   </bandwidth>
4155 ~   <latency>
4160 ~       data="tod.interval,min,max,avg"
4165 ~   </latency>
4170 ~   ...
4175 ~</tunnel>
4180 ~<interface>
4185 ~   name="eth0" | "tcp0" | "ipsec0"
4190 ~   <bandwidth>
4195 ~       data="tod.interval,tx_bytes,tx_pkts,tx_errs,tx_dropped,
4200 ~       rx_bytes,rx_pkts,rx_errs,rx_dropped"
4205 ~   </bandwidth>
4210 ~   ...

```

FIG. 41